

**OFFICE OF THE ENGINEER-IN-CHIEF (BUILDINGS) &
CHIEF ENGINEER (BUILDINGS), PWD, CHENNAI REGION, CHENNAI-5**

Present: **Er. M. Rajamohan, B.E.,**
Engineer-in-Chief (Buildings) &
Chief Engineer (Buildings), PWD, Chennai Region,
Chepauk, Chennai-5.

Proceedings No. HDO (B) / 65325 / 2001, dated 14.08.2019

Sub: Buildings - Common Schedule of Plinth Area Rates for the Valuation of Buildings for Rental Calculation Purpose by Public Works Department and for the purpose of Collection of Stamp Duty by Registration Department - **Approved for the year 2019-2020 for adoption with effect from 16.08.2019** - Communication of - Regarding.

Ref: Engineer-in-Chief (Buildings) & Chief Engineer (Buildings), Chennai Region, PWD, Chennai-5, Proc. No. HDO (B) / 65325 / 2001, dated 14.08.2018.

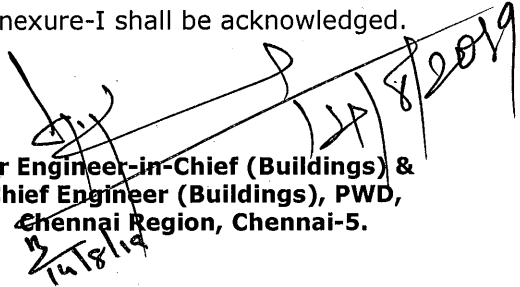


The common Schedule of Plinth Area Rates for the Valuation of Buildings (i) for Rental Calculation Purpose by PWD and (ii) for Collection of Stamp Duty by Registration Department during the year **2019-2020** is hereby approved and enclosed vide Annexure-I for adoption with effect from **16.08.2019**. The approved rates shall be in operation for **One Year (i.e.) upto 15.08.2020**.

The Chief Engineers, the Superintending Engineers and the Executive Engineers of Building Organisation are requested to adopt the above rates for working out the rental calculation of buildings.

The receipt of this proceeding together with Annexure-I shall be acknowledged.

Encl.: Annexure-I


**for Engineer-in-Chief (Buildings) &
Chief Engineer (Buildings), PWD,
Chennai Region, Chennai-5.**

To

The Chief Engineer (Buildings), PWD, Trichy Region, Trichy.
The Chief Engineer (Buildings), PWD, Madurai Region, Madurai.

Copy with Annexure-I communicated to:

The Superintending Engineers of Building Organisation, Public Works Department.
The Executive Engineers of Building Organisation, Public Works Department.
The Senior Audit Officer, Indian Audit and Accounts Department, Accountant General (Audit) II, Chennai-18.
The Inspector General of Registration, No.100, Santhome High Road, Chennai-28.
Copy to the Joint Chief Engineer (Buildings), PWD, Chennai-5.
Copy to the Joint Chief Engineer (Electrical), PWD, Chennai-5.
Copy to the Deputy Chief Engineer (Buildings), PWD, Chennai-5.
Copy to HDO, AEEs of all Technical Sections of EIC (B) & CE (B), PWD, CR, Chennai-5.
Copy to Stock File / Copy to File / Spare copies (50 Nos.).

**OFFICE OF THE ENGINEER-IN-CHIEF (BUILDINGS) &
CHIEF ENGINEER (BUILDINGS), PWD, CHENNAI REGION, CHEPAUK, CHENNAI-5**

**COMMON SCHEDULE OF PLINTH AREA RATES FOR THE VALUATION OF BUILDINGS
FOR RENTAL CALCULATION PURPOSE BY PWD AND FOR THE PURPOSE OF
COLLECTION OF STAMP DUTY BY REGISTRATION DEPARTMENT
DURING THE YEAR 2019-2020
[WITH EFFECT FROM 16.08.2019]**

INDEX

Sl. No.	Description	Page No.
	GENERAL NOTE	1
I	CLASS-A (LOAD BEARING STRUCTURE)	2 & 3
II	CLASS-A1 (LOAD BEARING STRUCTURE)	4 & 5
III	CLASS-B (LOAD BEARING STRUCTURE)	6 & 7
IV	CLASS-B1 (LOAD BEARING STRUCTURE)	8 & 9
V	CLASS-C (LOAD BEARING STRUCTURE)	10
VI	CLASS-D (LOAD BEARING STRUCTURE)	11 & 12
VII	CLASS-D1 (LOAD BEARING STRUCTURE)	13 & 14
VIII	CLASS-E (RCC FRAMED STRUCTURE)	15
IX	CLASS-E1 (RCC FRAMED STRUCTURE)	16
X	CLASS-E2 (RCC FRAMED STRUCTURE)	17
XI	CLASS-E3 (RCC FRAMED STRUCTURE)	18
XII	GODOWN	19
XIII	Building built with brick work in mud mortar and partly with RR masonry in mud mortar and brick jelly concrete in lime for foundation and ordinary flooring; roofing with RCC / Madras Terrace in which country wood has been used throughout	20
XIV	THATCHED / TILED ROOF	21
XV	GARAGE BUILDINGS	22
XVI	MISCELLANEOUS ITEMS	23 to 25
XVII	FOR EXTERNAL SERVICES AND FOR INTERNAL SERVICES	26
XVIII	ELECTRICAL ITEMS	27 & 28

**OFFICE OF THE ENGINEER-IN-CHIEF (BUILDINGS) &
CHIEF ENGINEER (BUILDINGS), PWD, CHENNAI REGION, CHEPAUK, CHENNAI-5**

ANNEXURE-I

**COMMON SCHEDULE OF PLINTH AREA RATES FOR THE VALUATION OF BUILDINGS
FOR RENTAL CALCULATION PURPOSE BY PWD AND FOR THE PURPOSE OF
COLLECTION OF STAMP DUTY BY REGISTRATION DEPARTMENT
DURING THE YEAR 2019-2020
[WITH EFFECT FROM 16.08.2019]**

The Common Schedule of Plinth Area Rates for the Valuation of Buildings with reference to the plinth area for each type of construction (excluding cost of land) shall be arrived at as given below.	
General Note to be followed in arriving at the Rental Valuation of Buildings	
a	The rates approved and furnished below vide Sl. No. I to XVIII are applicable commonly to the entire State, subject to the following provisions:
i	An extra 20% shall be added to the rates approved vide Sl. No. I to XV below for valuation of Buildings within Chennai Corporation limits and its belt area of 32 km around Chennai Corporation limit.
ii	An extra 15% shall be added to the rates approved vide Sl. No. I to XV below for Valuation of Buildings within Coimbatore, Erode and Tiruppur Corporation limits
iii	An extra 10% shall be added to the rates approved vide Sl. No. I to XV below for Valuation of Buildings within Corporation limits of Trichy, Madurai, Salem, Tirunelveli, Thoothukudi and Vellore
iv	An extra 5% shall be added to the rates approved vide Sl. No. I to XV below for Valuation of Buildings within all Municipal limits.
v	An extra 10% shall be added to the rates approved vide Sl. No. I to XV below for Valuation of Buildings located in Nilgiris, Kodaikanal and Yercaud Hills, where tourist attractions are more.
b	The Field Officers are requested to follow the instructions contained in G.O.Ms.No.51, Finance (Salaries) Department, dated 01.03.2017 in fixation of either new rent or renewal of rent scrupulously, so that there shall not be any extra financial burden to the Government towards the payment of rent to the Private Buildings occupied by the Government Offices.
	New Notes
c	Load Bearing Structure: Building with masonry walls (stone or brick) to carry the loads from slabs without RCC (or) steel columns.
d	Framed Structure: Building with frames comprising of RCC (or) steel columns and beams to carry the loads from slabs.

Sl. No.	Type of construction	Unit	Rates approved for the year 2019-2020 (In Rupees)
I	CLASS-A (LOAD BEARING STRUCTURE)		
	Building built with brick work in lime mortar (or) cement mortar in which teak wood has been used throughout		
1	Roof with RCC Slab		
a	Ground Floor	Sq.m.	8370.00
b	First Floor	Sq.m.	7760.00
c	Second Floor	Sq.m.	7900.00
d	Other upper floors (add extra for each floors)	Sq.m.	119.20
2	Roof with Madras Terrace		
a	Ground Floor	Sq.m.	7660.00
b	First Floor	Sq.m.	7180.00
c	Second Floor	Sq.m.	7300.00
d	Other upper floors (add extra for each floors)	Sq.m.	119.20
3	Roof with Mangalore Tiles over Flat Tiles		
a	Ground Floor	Sq.m.	6090.00
b	First Floor	Sq.m.	5620.00
c	Second Floor	Sq.m.	5730.00
d	Other upper floors (add extra for each floors)	Sq.m.	94.60
4	Roof with Plain Mangalore Tiles		
a	Ground Floor	Sq.m.	5730.00
b	First Floor	Sq.m.	5250.00
c	Second Floor	Sq.m.	5370.00
d	Other upper floors (add extra for each floors)	Sq.m.	94.60
5	Roof with Pan Tiles over Flat Tiles		
a	Ground Floor	Sq.m.	5620.00
b	First Floor	Sq.m.	5140.00
c	Second Floor	Sq.m.	5250.00
d	Other upper floors (add extra for each floors)	Sq.m.	94.60

Sl. No.	Type of construction	Unit	Rates approved for the year 2019-2020 (In Rupees)
6	Roof with Pan Tiles without Flat Tiles		
a	Ground Floor	Sq.m.	5020.00
b	First Floor	Sq.m.	4530.00
c	Second Floor	Sq.m.	4650.00
d	Other upper floors (add extra for each floors)	Sq.m.	94.60
7	Roof with AC Sheet		
a	Ground Floor	Sq.m.	4730.00
b	First Floor	Sq.m.	4250.00
c	Second Floor	Sq.m.	4380.00
d	Other upper floors (add extra for each floors)	Sq.m.	93.70
8	Roof with GI Sheet		
a	Ground Floor	Sq.m.	4860.00
b	First Floor	Sq.m.	4380.00
c	Second Floor	Sq.m.	4490.00
d	Other upper floors (add extra for each floors)	Sq.m.	93.70
	RATE OF DEPRECIATION		1%

Sl. No.	Type of construction	Unit	Rates approved for the year 2019-2020 (In Rupees)
II	CLASS-A1 (LOAD BEARING STRUCTURE)		
	Building built with brick work in lime mortar (or) cement mortar in which country wood has been used throughout		
1	Roof with RCC Slab		
a	Ground Floor	Sq.m.	7530.00
b	First Floor	Sq.m.	6810.00
c	Second Floor	Sq.m.	6950.00
d	Other upper floors (add extra for each floors)	Sq.m.	119.20
2	Roof with Madras Terrace		
a	Ground Floor	Sq.m.	6810.00
b	First Floor	Sq.m.	6220.00
c	Second Floor	Sq.m.	6330.00
d	Other upper floors (add extra for each floors)	Sq.m.	119.20
3	Roof with Mangalore Tiles over Flat Tiles		
a	Ground Floor	Sq.m.	5370.00
b	First Floor	Sq.m.	4650.00
c	Second Floor	Sq.m.	4770.00
d	Other upper floors (add extra for each floors)	Sq.m.	94.60
4	Roof with Plain Mangalore Tiles		
a	Ground Floor	Sq.m.	4900.00
b	First Floor	Sq.m.	4290.00
c	Second Floor	Sq.m.	4420.00
d	Other upper floors (add extra for each floors)	Sq.m.	94.60
5	Roof with Pan Tiles over Flat Tiles		
a	Ground Floor	Sq.m.	4770.00
b	First Floor	Sq.m.	4290.00
c	Second Floor	Sq.m.	4420.00
d	Other upper floors (add extra for each floors)	Sq.m.	94.60

Sl. No.	Type of construction	Unit	Rates approved for the year 2019-2020 (In Rupees)
6	Roof with Pan Tiles without Flat Tiles		
a	Ground Floor	Sq.m.	4290.00
b	First Floor	Sq.m.	3810.00
c	Second Floor	Sq.m.	3930.00
d	Other upper floors (add extra for each floors)	Sq.m.	94.60
7	Roof with AC Sheet		
a	Ground Floor	Sq.m.	4380.00
b	First Floor	Sq.m.	3890.00
c	Other upper floors (add extra for each floors)	Sq.m.	93.70
8	Roof with GI Sheet		
a	Ground Floor	Sq.m.	4570.00
b	First Floor	Sq.m.	4080.00
c	Other upper floors (add extra for each floors)	Sq.m.	93.70
	RATE OF DEPRECIATION		1%

Sl. No.	Type of construction	Unit	Rates approved for the year 2019-2020 (In Rupees)
III	CLASS-B (LOAD BEARING STRUCTURE)		
	Building built with brick work in lime mortar (or) cement mortar & partly mud mortar in which teak wood has been used throughout		
1	Roof with RCC Slab		
a	Ground Floor	Sq.m.	6810.00
b	First Floor	Sq.m.	6220.00
c	Second Floor	Sq.m.	6340.00
d	Other upper floors (add extra for each floors)	Sq.m.	119.20
2	Roof with Madras Terrace		
a	Ground Floor	Sq.m.	6090.00
b	First Floor	Sq.m.	5620.00
c	Second Floor	Sq.m.	5730.00
d	Other upper floors (add extra for each floors)	Sq.m.	119.20
3	Roof with Mangalore Tiles over Flat Tiles		
a	Ground Floor	Sq.m.	4770.00
b	First Floor	Sq.m.	4170.00
c	Second Floor	Sq.m.	4290.00
d	Other upper floors (add extra for each floors)	Sq.m.	94.60
4	Roof with Plain Mangalore Tiles		
a	Ground Floor	Sq.m.	4420.00
b	First Floor	Sq.m.	3810.00
c	Second Floor	Sq.m.	3930.00
d	Other upper floors (add extra for each floors)	Sq.m.	94.60
5	Roof with Pan Tiles over Flat Tiles		
a	Ground Floor	Sq.m.	4180.00
b	First Floor	Sq.m.	3700.00
c	Second Floor	Sq.m.	3810.00
d	Other upper floors (add extra for each floors)	Sq.m.	94.60

Sl. No.	Type of construction	Unit	Rates approved for the year 2019-2020 (In Rupees)
6	Roof with Pan Tiles without Flat Tiles		
a	Ground Floor	Sq.m.	3810.00
b	First Floor	Sq.m.	3330.00
c	Second Floor	Sq.m.	3450.00
d	Other upper floors (add extra for each floors)	Sq.m.	94.60
7	Roof with AC Sheet		
a	Ground Floor	Sq.m.	3890.00
b	First Floor	Sq.m.	3420.00
c	Other upper floors (add extra for each floors)	Sq.m.	93.70
8	Roof with GI Sheet		
a	Ground Floor	Sq.m.	4020.00
b	First Floor	Sq.m.	3540.00
c	Other upper floors (add extra for each floors)	Sq.m.	93.70
	RATE OF DEPRECIATION		1.50%

Sl. No.	Type of construction	Unit	Rates approved for the year 2019-2020 (In Rupees)
IV	CLASS-B1 (LOAD BEARING STRUCTURE)		
	Building built with brick work in lime mortar (or) cement mortar and partly in mud mortar in which country wood has been used throughout		
1	Roof with RCC Slab		
a	Ground Floor	Sq.m.	6220.00
b	First Floor	Sq.m.	5620.00
c	Second Floor	Sq.m.	5730.00
d	Other upper floors (add extra for each floors)	Sq.m.	119.20
2	Roof with Madras Terrace		
a	Ground Floor	Sq.m.	5500.00
b	First Floor	Sq.m.	5020.00
c	Second Floor	Sq.m.	5140.00
d	Other upper floors (add extra for each floors)	Sq.m.	119.20
3	Roof with Mangalore Tiles over Flat Tiles		
a	Ground Floor	Sq.m.	4290.00
b	First Floor	Sq.m.	3810.00
c	Second Floor	Sq.m.	3930.00
d	Other upper floors (add extra for each floors)	Sq.m.	94.60
4	Roof with Plain Mangalore Tiles		
a	Ground Floor	Sq.m.	3930.00
b	First Floor	Sq.m.	3450.00
c	Second Floor	Sq.m.	3580.00
d	Other upper floors (add extra for each floors)	Sq.m.	94.60
5	Roof with Pan Tiles over Flat Tiles		
a	Ground Floor	Sq.m.	3700.00
b	First Floor	Sq.m.	3210.00
c	Second Floor	Sq.m.	3330.00
d	Other upper floors (add extra for each floors)	Sq.m.	94.60

Sl. No.	Type of construction	Unit	Rates approved for the year 2019-2020 (In Rupees)
6	Roof with Pan Tiles without Flat Tiles		
a	Ground Floor	Sq.m.	3580.00
b	First Floor	Sq.m.	3100.00
c	Second Floor	Sq.m.	3210.00
d	Other upper floors (add extra for each floors)	Sq.m.	94.60
7	Roof with AC Sheet		
a	Ground Floor	Sq.m.	3660.00
b	First Floor	Sq.m.	3190.00
c	Other upper floors (add extra for each floors)	Sq.m.	93.70
8	Roof with GI Sheet		
a	Ground Floor	Sq.m.	3390.00
b	First Floor	Sq.m.	3300.00
c	Other upper floors (add extra for each floors)	Sq.m.	93.70
	RATE OF DEPRECIATION		2%

Sl. No.	Type of construction	Unit	Rates approved for the year 2019-2020 (In Rupees)
V	CLASS-C (LOAD BEARING STRUCTURE)		
	Building built with brick work in mud mortar in which country wood has been used throughout		
1	Roof with RCC Slab		
a	Ground Floor	Sq.m.	5280.00
b	First Floor	Sq.m.	4650.00
2	Roof with Madras Terrace		
a	Ground Floor	Sq.m.	4770.00
b	First Floor	Sq.m.	4290.00
3	Roof with Mangalore Tiles over Flat Tiles		
a	Ground Floor	Sq.m.	3700.00
b	First Floor	Sq.m.	3330.00
4	Roof with Plain Mangalore Tiles		
a	Ground Floor	Sq.m.	3330.00
b	First Floor	Sq.m.	2980.00
5	Roof with Pan Tiles over Flat Tiles		
a	Ground Floor	Sq.m.	3210.00
b	First Floor	Sq.m.	2870.00
6	Roof with Pan Tiles without Flat Tiles		
a	Ground Floor	Sq.m.	2980.00
b	First Floor	Sq.m.	2730.00
7	Roof with AC Sheet		
a	Ground Floor	Sq.m.	3300.00
b	First Floor	Sq.m.	2940.00
8	Roof with GI Sheet		
a	Ground Floor	Sq.m.	3420.00
b	First Floor	Sq.m.	3060.00
	RATE OF DEPRECIATION		2%

Sl. No.	Type of construction	Unit	Rates approved for the year 2019-2020 (In Rupees)
VI	CLASS-D (LOAD BEARING STRUCTURE)		
	Building built with brick work in lime or cement mortar in which partly wood and partly steel has been used throughout		
1	Roof with RCC Slab		
a	Ground Floor	Sq.m.	5510.00
b	First Floor	Sq.m.	4770.00
c	Second Floor	Sq.m.	4900.00
d	Other upper floors (add extra for each floors)	Sq.m.	119.20
2	Roof with Madras Terrace		
a	Ground Floor	Sq.m.	4900.00
b	First Floor	Sq.m.	4420.00
c	Second Floor	Sq.m.	4530.00
d	Other upper floors (add extra for each floors)	Sq.m.	119.20
3	Roof with Mangalore Tiles over Flat Tiles		
a	Ground Floor	Sq.m.	3810.00
b	First Floor	Sq.m.	3450.00
c	Second Floor	Sq.m.	3580.00
d	Other upper floors (add extra for each floors)	Sq.m.	94.60
4	Roof with Plain Mangalore Tiles		
a	Ground Floor	Sq.m.	3450.00
b	First Floor	Sq.m.	3100.00
c	Second Floor	Sq.m.	3210.00
d	Other upper floors (add extra for each floors)	Sq.m.	94.60
5	Roof with Pan Tiles over Flat Tiles		
a	Ground Floor	Sq.m.	3330.00
b	First Floor	Sq.m.	2980.00
c	Second Floor	Sq.m.	3100.00
d	Other upper floors (add extra for each floors)	Sq.m.	94.60

Sl. No.	Type of construction	Unit	Rates approved for the year 2019-2020 (In Rupees)
6	Roof with Pan Tiles without Flat Tiles		
a	Ground Floor	Sq.m.	3100.00
b	First Floor	Sq.m.	2870.00
c	Second Floor	Sq.m.	2950.00
d	Other upper floors (add extra for each floors)	Sq.m.	94.60
7	Roof with AC Sheet		
a	Ground Floor	Sq.m.	3420.00
b	First Floor	Sq.m.	2940.00
c	Other upper floors (add extra for each floors)	Sq.m.	93.70
8	Roof with GI Sheet		
a	Ground Floor	Sq.m.	3550.00
b	First Floor	Sq.m.	3190.00
c	Other upper floors (add extra for each floors)	Sq.m.	93.70
	RATE OF DEPRECIATION		1.50%

Sl. No.	Type of construction	Unit	Rates approved for the year 2019-2020 (In Rupees)
VII	CLASS-D1 (LOAD BEARING STRUCTURE)		
	Building built with brick in lime or cement mortar in which steel frame is used throughout		
1	Roof with RCC Slab		
a	Ground Floor	Sq.m.	5630.00
b	First Floor	Sq.m.	5010.00
c	Second Floor	Sq.m.	5140.00
d	Other upper floors (add extra for each floors)	Sq.m.	120.00
2	Roof with Madras Terrace		
a	Ground Floor	Sq.m.	5140.00
b	First Floor	Sq.m.	4640.00
c	Second Floor	Sq.m.	4760.00
d	Other upper floors (add extra for each floors)	Sq.m.	120.00
3	Roof with Mangalore Tiles over Flat Tiles		
a	Ground Floor	Sq.m.	4030.00
b	First Floor	Sq.m.	3660.00
c	Second Floor	Sq.m.	3780.00
d	Other upper floors (add extra for each floors)	Sq.m.	98.40
4	Roof with Plain Mangalore Tiles		
a	Ground Floor	Sq.m.	3660.00
b	First Floor	Sq.m.	3300.00
c	Second Floor	Sq.m.	3410.00
d	Other upper floors (add extra for each floors)	Sq.m.	98.40
5	Roof with Pan Tiles over Flat Tiles		
a	Ground Floor	Sq.m.	3540.00
b	First Floor	Sq.m.	3170.00
c	Second Floor	Sq.m.	3300.00
d	Other upper floors (add extra for each floors)	Sq.m.	98.40

Sl. No.	Type of construction	Unit	Rates approved for the year 2019-2020 (In Rupees)
6	Roof with Pan Tiles without Flat Tiles		
a	Ground Floor	Sq.m.	3300.00
b	First Floor	Sq.m.	3030.00
c	Second Floor	Sq.m.	3150.00
d	Other upper floors (add extra for each floors)	Sq.m.	98.40
7	Roof with AC Sheet		
a	Ground Floor	Sq.m.	3620.00
b	First Floor	Sq.m.	3140.00
c	Other upper floors (add extra for each floors)	Sq.m.	97.40
8	Roof with GI Sheet		
a	Ground Floor	Sq.m.	3750.00
b	First Floor	Sq.m.	3370.00
c	Other upper floors (add extra for each floors)	Sq.m.	97.40
	RATE OF DEPRECIATION		1%

Sl. No.	Type of construction	Unit	Rates approved for the year 2019-2020 (In Rupees)
VIII	CLASS-E (RCC FRAMED STRUCTURE)		
1	Framed structure building built in cement mortar in which teak wood joineries is used for construction (excluding water supply, sanitary and electrical installations)		
a	Ground Floor	Sq.m.	9440.00
b	First Floor	Sq.m.	8820.00
c	Second Floor	Sq.m.	8940.00
d	Third Floor	Sq.m.	9070.00
e	Other upper floors (add extra for each floors)	Sq.m.	122.00
2	Balcony / Portico projecting outside the face of the building with hand rail with brick work/wood/grill	Sq.m.	3220.00
	RATE OF DEPRECIATION		1%

Sl. No.	Type of construction	Unit	Rates approved for the year 2019-2020 (In Rupees)
	NEW ITEM		
IX	CLASS-E1 (RCC FRAMED STRUCTURE)		
1	Framed structure building built in cement mortar in which country wood joineries is used for construction (excluding water supply, sanitary and electrical installations)		
a	Ground Floor	Sq.m.	8600.00
b	First Floor	Sq.m.	7870.00
c	Second Floor	Sq.m.	7990.00
d	Third Floor	Sq.m.	8120.00
e	Other upper floors (add extra for each floors)	Sq.m.	122.00
2	Balcony / Portico projecting outside the face of the building with hand rail with brick work/wood/grill	Sq.m.	3220.00
	RATE OF DEPRECIATION		1%

Sl. No.	Type of construction	Unit	Rates approved for the year 2019-2020 (In Rupees)
	NEW ITEM		
X	CLASS-E2 (RCC FRAMED STRUCTURE)		
1	Framed structure building built in cement mortar in which steel frame joineries is used for construction (excluding water supply, sanitary and electrical installations)		
a	Ground Floor	Sq.m.	6690.00
b	First Floor	Sq.m.	6060.00
c	Second Floor	Sq.m.	6180.00
d	Third Floor	Sq.m.	6310.00
e	Other upper floors (add extra for each floors)	Sq.m.	122.00
2	Balcony / Portico projecting outside the face of the building with hand rail with brick work/wood/grill	Sq.m.	3220.00
	RATE OF DEPRECIATION		1%

Sl. No.	Type of construction	Unit	Rates approved for the year 2019-2020 (In Rupees)
	NEW ITEM		
XI	CLASS-E3 (RCC FRAMED STRUCTURE)		
1	Framed structure building built in cement mortar in which partly wood joineries and partly steel joineries is used for construction (excluding water supply, sanitary & electrical installations)		
a	Ground Floor	Sq.m.	6570.00
b	First Floor	Sq.m.	5830.00
c	Second Floor	Sq.m.	5950.00
d	Third Floor	Sq.m.	6070.00
e	Other upper floors (add extra for each floors)	Sq.m.	122.00
2	Balcony / Portico projecting outside the face of the building with hand rail with brick work/wood/grill	Sq.m.	3220.00
	RATE OF DEPRECIATION		1%

Sl. No.	Type of construction	Unit	Rates approved for the year 2019-2020 (In Rupees)
XII	GODOWN		
2 a	For godowns / Hall type construction with RCC columns and connecting beams etc. with steel trusses and purlins		
	Roofing with AC Sheet	Sq.m.	6900.00
	Roofing with GI Sheet	Sq.m.	7150.00
b	For godowns / Hall type construction with load bearing type construction with steel trusses and purlins		
	Roofing with AC Sheet	Sq.m.	6400.00
	Roofing with GI Sheet	Sq.m.	6510.00
	RATE OF DEPRECIATION		1%

Sl. No.	Type of construction	Unit	Rates approved for the year 2019-2020 (In Rupees)
XIII	Building built with brick work in mud mortar and partly with RR masonry in mud mortar and brick jelly concrete in lime for foundation and ordinary flooring; roofing with RCC/Madras Terrace in which country wood has been used throughout		
1	Roof with RCC slab		
	Ground Floor	Sq.m.	5850.00
	First Floor	Sq.m.	5020.00
2	Roof with Madras Terrace		
a	Ground Floor	Sq.m.	5140.00
b	First Floor	Sq.m.	4420.00
3	Roof with Mangalore Tiles over Flat Tiles		
a	Ground Floor	Sq.m.	3930.00
b	First Floor	Sq.m.	3330.00
4	Roof with Plain Mangalore Tiles		
a	Ground Floor	Sq.m.	3580.00
b	First Floor	Sq.m.	3100.00
5	Roof with Pan Tiles over Flat Tiles		
a	Ground Floor	Sq.m.	3330.00
b	First Floor	Sq.m.	2870.00
6	Roof with Pan Tiles without Flat Tiles		
a	Ground Floor	Sq.m.	3210.00
b	First Floor	Sq.m.	2730.00
7	Roof with AC Sheet		
a	Ground Floor	Sq.m.	3420.00
b	First Floor	Sq.m.	2840.00
8	Roof with GI Sheet		
a	Ground Floor	Sq.m.	3550.00
b	First Floor	Sq.m.	2940.00
	RATE OF DEPRECIATION		2.50%

Sl. No.	Type of construction	Unit	Rates approved for the year 2019-2020 (In Rupees)
XIV	THATCHED / TILED ROOF		
1	Building built with brick work in clay and plastered with lime mortar or cement mortar, ordinary grano flooring, white or colour washed, thatched roof either with coconut leaves or palmyrah leaves over CW or bamboo rafters, etc.		
a	Ground Floor	Sq.m.	2710.00
2	Building built with plain mud walls plastered with mud mortar and thatched roof either with coconut leaves of palmyrah leaves over bamboo or country wood rafters etc.		
a	Ground Floor	Sq.m.	1350.00
3	Building built with plain mud walls and plastered with mud mortar & roof with mangalore tiles using bamboo or country wood rafters etc.	Sq.m.	1790.00
4	Building built with plain mud walls and plastered with mud mortar and roof with pan tiles using bamboo or country wood rafters	Sq.m.	1570.00
5	Building built with plain mud walls and plastered with mud mortar and roof with AC sheet	Sq.m.	1910.00
6	Building built with plain mud walls and plastered with mud mortar and roof with GI sheet	Sq.m.	1960.00
	RATE OF DEPRECIATION		4%

Sl. No.	Type of construction	Unit	Rates approved for the year 2019-2020 (In Rupees)
XV	GARAGE BUILDINGS		
a	Garage buildings built with brick work in lime or cement mortar and roof with RCC slab in which teak wood or rolling shutters used.	Sq.m.	3460.00
b	Garage building built with brick work in lime or cement mortar with mangalore tile or pan tile roof over flat tiles in which teak wood or rolling shutters used.	Sq.m.	3220.00
	RATE OF DEPRECIATION		1%
c	Garage buildings built with brick work in partly clay and partly lime or cement mortar and roof with RCC slab in which country wood used throughout.	Sq.m.	3450.00
d	Garage building built with brick work in partly clay and partly lime or cement mortar with mangalore tiles or pan tiles roof over flat tiles in which country wood used throughout.	Sq.m.	2980.00
	RATE OF DEPRECIATION		2%

Sl. No.	Type of construction	Unit	Rates approved for the year 2019-2020 (In Rupees)
XVI	MISCELLANEOUS ITEMS		
1	Open area paved either with cement concrete (or) brick (or) stone slabs with retaining walls	Sq.m.	675.00
2	Fencing the area with RCC post and covered either with barbed wire or chain link 1.65m height from Ground level.	RM	500.00
	RATE OF DEPRECIATION		4%
3	Construction of compound wall to a normal height of 1.50m from ground level with required number of gates, grills, etc.		
	i. With load bearing foundation with brick work in cement mortar 1:5	RM	3370.00
4	i. Mosaic Flooring Grey Colour Tiles	Sq.m.	662.00
	ii. Mosaic Flooring with Colour Tiles (other than Grey)	Sq.m.	746.00
	iii. Dadoing with Mosaic in Situ	Sq.m.	647.00
5	Cuddapah Slab / Shahabad Slab Flooring	Sq.m.	450.00
6	Flooring with Granite Slabs 18 to 20mm thick	Sq.m.	2470.00
7	i. Flooring with Vitrified Tiles	Sq.m.	1070.00
	ii. Dadoing with Vitrified Tiles	Sq.m.	925.00
8	i. Flooring with Ceramic Tiles	Sq.m.	718.00
	ii. Dadoing with Ceramic / Glazed Tiles	Sq.m.	623.00
9	i. Flooring with Marble Tiles	Sq.m.	1230.00
	ii. Flooring with Marble Slabs		
	a. for Slab of size 1.20 metre and above	Sq.m.	1780.00
	b. for Slab of size below 1.20 metre	Sq.m.	1450.00
	RATE OF DEPRECIATION		2%
10	Iron gates (1.2m height & 3m width)		
	i. Iron gates with ornamental grill	Sq.m.	1580.00
	ii. Iron gates with GI pipe around & weld mesh inbetween	Sq.m.	997.00

Sl. No.	Type of construction	Unit	Rates approved for the year 2019-2020 (In Rupees)
11	Rolling shutters	Sq.m.	2190.00
12	Over head tanks		
	i. In brick work / litre	litre	14.25
	ii. PVC tanks / litre	litre	4.50
	New Item		
	iii. In RCC / litre	litre	66.00
13	Municipal Water Tap Service connection	Each	2810.00
14	Hand pump	Each	2810.00
15	Bore well		
	i. Upto 50 metre depth / m	RM	170.00
	ii. 50 to 100 metre depth	RM	180.00
	iii. 100 to 200 metre depth	RM	185.00
16	i. Open Well 1.20 metre dia with brick steining 7.50 metre deep	Each	16800.00
	ii. Open well 1.50 metre dia with brick steining 7.50 metre deep	Each	21000.00
	iii. Open well 1.80 metre dia with brick steining 7.50 metre deep	Each	25100.00
	iv. Open well 2.00 metre dia with brick steining 7.50 metre deep	Each	30500.00
17	i. False ceiling using aluminium tees, angles with particle board 60 x 60cm size	Sq.m.	834.00
	ii. Using plywood 5mm thick	Sq.m.	586.00
18	Septic tank built in brick work in cement mortar precast cover slab with inlet and outlet (On volume basis)		
	for 1 cum capacity	Cu.m.	9760.00
19	Inspection chambers with RCC cover slab built in brick work in cement mortar, 23cm thick, plastered and finished		
	i. 60 x 60 x 60cm size	Each	1950.00
	ii. 60 x 60 x 75cm size	Each	2370.00
	iii. 60 x 60 x 90cm size	Each	2920.00

Sl. No.	Type of construction	Unit	Rates approved for the year 2019-2020 (In Rupees)
20	i. Providing IWC with water line, tap, flush out system etc.	Each	4800.00
	ii. Providing EWC 580mm with water line, tap, flush out system etc.	Each	6100.00
21	Wash basin including water line, tap, etc.	Each	2170.00
22	Provision of towel rod and mirror of size 550 x 440mm	Each	982.00
23	Flat back urinal with water line, valves, etc	Each	1300.00
24	Sink with water line, tap, etc	Each	2170.00
25	Open latrine with 1.80 metre height wall built in brick work in cement mortar.	Sq.m.	2990.00
26	i. Bathroom with GI water line, taps, shower line etc. (minimum room size 1.50m x 1.35m)	Each	4290.00
	ii. Bathroom with PVC water line, tap, shower line, etc. (minimum room size 1.50m x 1.35m)	Each	3750.00
	iii. Bath Tub with all accessories (Porcelain)	Each	16000.00
	iv. Bath Tub with all accessories (built with mosaic finish)	Each	4290.00

Sl. No.	Type of construction	Unit	Rates approved for the year 2019-2020 (In Rupees)
XVII	I. FOR EXTERNAL SERVICES		
1	50mm dia CI pipe line and specials	RM	517.00
2	75mm dia CI pipe line and specials	RM	728.00
3	100mm dia SW pipe line and specials	RM	161.00
4	150mm dia SW pipe line and specials	RM	269.00
5	100mm dia PVC pipe line and specials	RM	305.00
6	75mm dia PVC pipe line and specials	RM	184.00
	II. FOR INTERNAL SERVICES		
1	Water supply arrangements (maximum)	on value of building	7.50%
2	Internal sanitary arrangements (maximum)	on value of building	7.50%
3	Internal electrical arrangements (maximum)	on value of building	7.50%

Sl. No.	Type of construction	Unit	Rates approved for the year 2019-2020 (In Rupees)
XVIII	ELECTRICAL ITEMS		
1	Plug point	Each	251.00
2	Fan point	Each	300.00
3	Light point	Each	286.00
4	1.20m flourescent fitting patty type with tube		
	i. Single	Each	403.00
	ii. Double	Each	732.00
5	40 W flourescent tube (single)	Each	81.00
6	1.20m flourescent fitting box type with tube		
	i. Single	Each	574.00
	ii. Double	Each	900.00
7	i. 1.20m sweep AC ceiling fan with regulator	Each	1970.00
	ii. 1.40m sweep AC ceiling fan with regulator	Each	2120.00
8	EXHAUST FAN	Each	1730.00
9	0.50 HP electric motor pump set		
	i. centrifugal	Each set	8210.00
	ii. Jet type	Each set	10500.00
10	1.00 HP electric motor pump set		
	i. Centrifugal	Each set	10000.00
	ii. Jet	Each set	12250.00
11	1.50 HP electric motor pump set		
	i. Centrifugal	Each set	11800.00
	ii. Jet	Each set	15500.00
12	2.00 HP electric motor pump set		
	i. Centrifugal	Each set	14600.00
	ii. Jet	Each set	18700.00
13	3.00 HP electric motor pump set		
	i. Centrifugal	Each set	18200.00
	ii. Jet	Each set	24500.00

Sl. No.	Type of construction	Unit	Rates approved for the year 2019-2020 (In Rupees)
14	5.00 H.P. electric motor pump set (JET)	Each set	30000.00
15	Air-conditioning (on floor area basis)		
	a. Non-Ductable	Sq.m.	3910.00
	b. Ductable	Sq.m.	5230.00
16	i. 8 Persons Capacity Passenger Lift (GF + 3 Floors)		
	a. Gearless Lift with Machine Room	Each	1560000.00
	b. Gearless Lift without Machine Room	Each	1630000.00
	ii. 10 Persons Capacity Passenger Lift (GF + 3 Floors)		
	a. Gearless Lift with Machine Room	Each	1630000.00
	b. Gearless Lift without Machine Room	Each	1710000.00
	iii. 13 Persons Capacity Passenger Lift (GF + 3 Floors)		
	a. Gearless Lift with Machine Room	Each	1810000.00
	b. Gearless Lift without Machine Room	Each	1900000.00
	iv. 20 Persons Capacity Passenger Lift (GF + 3 Floors)		
	a. Gearless Lift with Machine Room	Each	2250000.00
	b. Gearless Lift without Machine Room	Each	2400000.00

for Engineer-in-Chief (Buildings),
 Chief Engineer (Buildings), PWD,
 Chennai Region, Chennai-5.